

GENERAL TIRE 

D660



GENERAL TIRE
MEDIUM TRUCK


D660

LONG HAUL DRIVE

30/32" closed shoulder tread design provides even tread wear while still providing excellent traction

Innovative tread pattern minimizes stone retention, providing excellent retread services

Stone ejection system reduces stone retention and casing penetrations

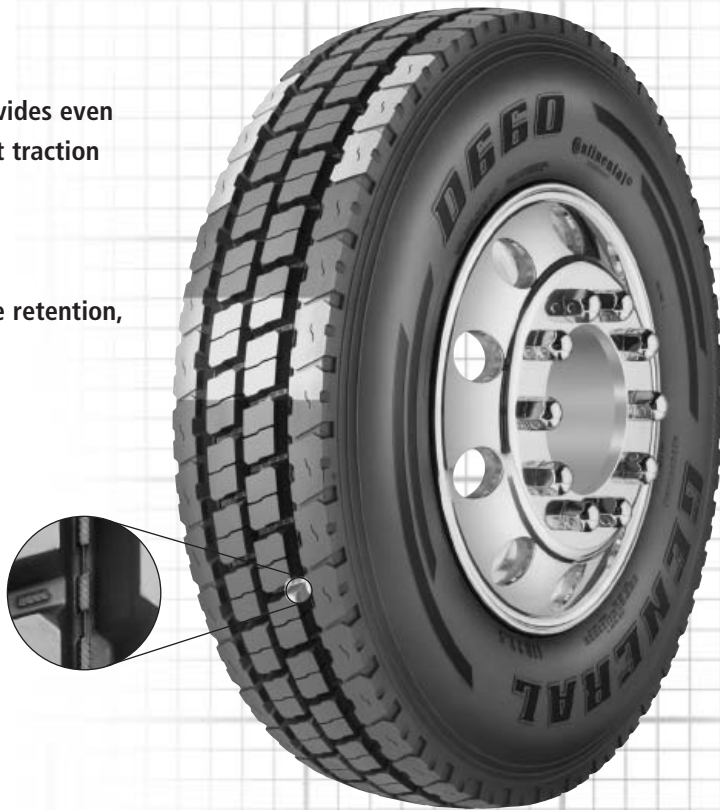

Applications:

Tandem drive axle to long and short over-the-highway use.

TIRE SPECIFICATIONS Highway - 75 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION			
													SINGLE		DUAL	
												lbs (KG)	psi (KPa)	lbs (KG)	psi (KPa)	
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																
11R22.5	G	30/32	0230921	05681730000	8.25	42.1 (1069)	11.1 (282)	12.3 (312)	19.6 (498)	12.5 (318)	492 (306)	124 (56)	6175 (2800)	105 (720)	5840 (2650)	105 (720)
11R22.5	H	30/32	0230922	05681740000	8.25	42.1 (1069)	11.1 (282)	12.3 (312)	19.6 (498)	12.5 (318)	492 (306)	124 (56)	6610 (3000)	120 (830)	6005 (2725)	120 (830)
11R24.5	G	30/32	0230923	05681750000	8.25	44.1 (1120)	11.1 (282)	12.3 (312)	20.6 (523)	12.5 (318)	469 (292)	133 (60)	6610 (3000)	105 (720)	6005 (2725)	105 (720)
11R24.5	H	30/32	0230924	05681760000	8.25	44.1 (1120)	11.1 (282)	12.3 (312)	20.6 (523)	12.5 (318)	469 (292)	133 (60)	7160 (3250)	120 (830)	6610 (3000)	120 (830)
295/75R22.5	G	30/32	0230925	05681770000	8.25	40.9 (1039)	10.9 (277)	12.0 (305)	19.1 (485)	12.5 (318)	506 (314)	118 (53)	6175 (2800)	110 (760)	5675 (2575)	110 (760)
285/75R24.5	G	30/32	0230926	05681780000	8.25	42.1 (1069)	10.8 (274)	11.9 (302)	19.7 (500)	12.5 (318)	492 (306)	123 (56)	6175 (2800)	110 (760)	5675 (2575)	110 (760)

Note: Minimum Dual Spacing calculated without chains.
These specifications subject to change without notice.