

GENERAL TIRE 

S360



GENERAL TIRE
MEDIUM TRUCK

S360


MULTI-PURPOSE ALL POSITION

All purpose, 18/32" tread pattern provides good mileage and abrasion resistance in all-position service.

Stone ejection system reduces stone retention and casing penetration.

Visual Alignment Indicators (VAI®) alerts users to tire tracking problems.

Multi-service tread compound provides good mileage and cut and tear resistance.

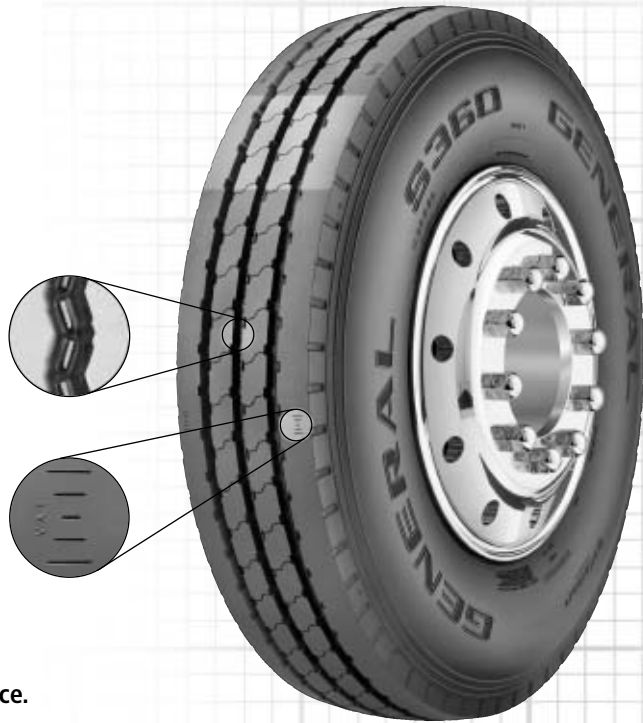

Applications:

General rib design for all position service, local delivery and short haul.

TIRE SPECIFICATIONS Highway - 75 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION			
													SINGLE lbs (KG)	psi (KPa)	DUAL lbs (KG)	psi (KPa)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																
9R22.5	G	16/32	0111737	05684010000	6.75	38.2 (970)	8.7 (222)	9.1 (230)	17.9 (455)	10.2 (260)	542 (336)	79 (36)	4950 (2240)	120 (830)	4675 (2120)	120 (830)
10R22.5	G	18/32	0174376	05683740000	7.50	39.9 (1013)	9.9 (251)	11.4 (290)	18.4 (467)	11.4 (290)	518 (322)	95 (43)	5675 (2575)	115 (790)	5355 (2430)	115 (790)
11R22.5	G	18/32	0174351	05683710000	8.25	41.4 (1052)	11.0 (278)	12.2 (310)	19.2 (488)	12.5 (318)	500 (311)	111 (50)	6175 (2800)	105 (720)	5840 (2650)	105 (720)
11R22.5*	H	18/32	0174352	05683720000	8.25	41.4 (1052)	11.0 (278)	12.2 (310)	19.2 (488)	12.5 (318)	500 (311)	113 (51)	6610 (3000)	120 (830)	6005 (2725)	120 (830)
11R24.5	H	18/32	0174360	05683730000	8.25	43.4 (1102)	11.0 (278)	12.2 (310)	20.4 (518)	12.5 (318)	475 (295)	123 (56)	7160 (3250)	120 (830)	6610 (3000)	120 (830)
TUBETYPE TIRES ON TYPE I, II, III RIMS																
9.00R20	G	17/32	0117054	05391020000	7.00	40.1 (1018)	10.2 (258)	10.5 (267)	18.5 (471)	11.9 (301)	516 (320)	120 (54)	5675 (2595)	115 (790)	5355 (2430)	115 (790)
10.00R20	H	18/32	0117057	05391040000	7.50	41.4 (1052)	10.8 (275)	11.1 (281)	19.1 (485)	12.6 (319)	500 (310)	127 (57)	6610 (3000)	120 (830)	6005 (2725)	120 (830)
11.00R20	H	18/32	0111284	05391070000	8.00	42.6 (1082)	11.3 (286)	11.8 (300)	19.6 (498)	13.4 (341)	486 (301)	136 (61)	7390 (3350)	120 (830)	6780 (3075)	120 (830)

Note: Minimum Dual Spacing calculated without chains.
These specifications subject to change without notice.

*ECE Certified.